

LC-D coupler is matching accessories for

	Page
OpDAT REGpro front cover	
3RU, 7HP / for 12xE2000/ 12x5C-S, unequipped	78


Q-LC coupler is matching accessories for

	Page
OpDAT REGplus for 6xSC-D, unequipped, / 1xM20, with shrink splice holder	76
OpDAT REGpro front cover 3RU, 7HP / for 6xSC-D/6xLC-Q, unequipped	77



LC-D coupler


- housing of the LC-D coupler made of plastic, M2 screws included in the delivery
- LC-D coupler in SC simplex design
- slotted zirconium oxide ceramics sleeve (ZrO₂) for single mode applications
- slotted metal sleeve (PhBr) for multi mode applications
- high material stability, surface quality and long service life
- service life min. 1000 mating cycles with slotted zirconium oxide ceramics sleeve
- service life min. 500 mating cycles with slotted metal sleeve
- variants: blue (SM), green (SM APC), heather violet (OM4), aqua (OM3), beige (OM2)

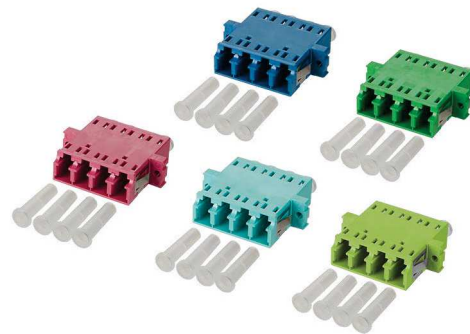

Q-LC coupler


- housing of the LC-D coupler made of plastic, M2 screws included in the delivery
- 4-fold LC coupler in SC duplex design
- slotted zirconium oxide ceramics sleeve (ZrO₂) for single mode applications
- slotted metal sleeve (PhBr) for multi mode applications
- high material stability, surface quality and long service life
- service life min. 1000 mating cycles with slotted zirconium oxide ceramics sleeve
- service life min. 500 mating cycles with slotted metal sleeve
- variants: blue (SM), green (SM APC), heather violet (OM4), aqua (OM3), beige (OM2)

Dimensional drawing

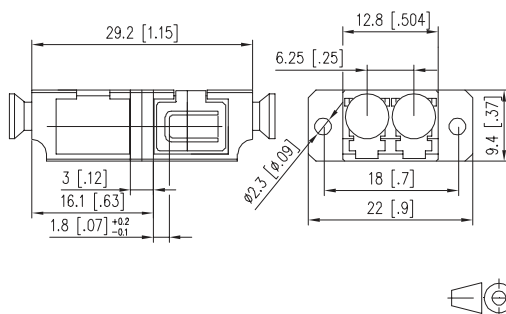

P/N	Color	Feature 1	Feature 2	EAN
15090074-I	blue	LC-D (ceramic)	SM	4250184113348
15090076-I	green	LC-D (ceramic)	SM APC	4250184146919
15090075-I	heather violet	LC-D (ceramic)	MM	4250184144588
15090077-I	aqua	LC-D (ceramic)	MM	4250184144571
15090073-I	beige	LC-D (Ph-Br)	MM	4250184111894

Dimensional drawing

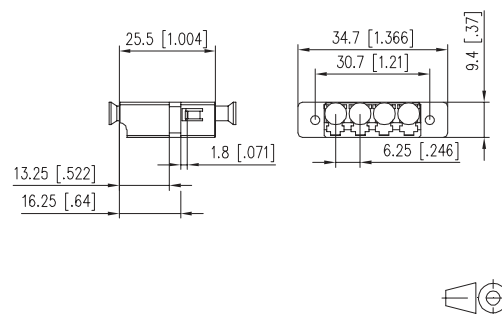

P/N	Color	Feature 1	Feature 2	EAN
15090071-I	blue	Q-LC (ceramic)	SM	4250184109556
1509007A-I	green	Q-LC (ceramic)	SM APC	4250184149361
15090079-I	heather violet	Q-LC (ceramic)	MM	4250184149354
15090078-I	aqua	Q-LC (ceramic)	MM	4250184149347
15090072-I	beige	Q-LC (Ph-Br)	MM	4250184119043

SC-D coupler is matching accessories for


OpDAT REGplus for 6xSC-D, unequipped, / 1xM20, with shrink splice holder Page 76

OpDAT REGpro front cover 3RU, 7HP / for 6xSC-D/6xLC-Q, unequipped 77

ST-D coupler is matching accessories for

OpDAT REGplus for 6xSC-D, unequipped, / 1xM20, with shrink splice holder Page 76


OpDAT REGpro front cover 3RU, 7HP / for 6xSC-D/6xLC-Q, unequipped 77

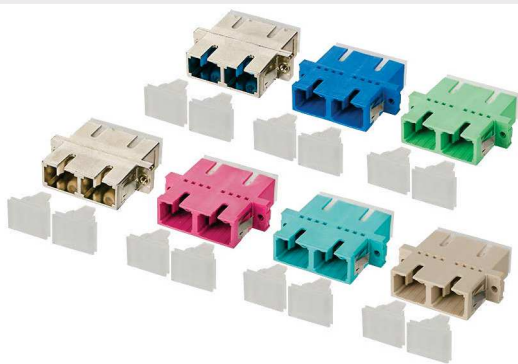

SC-D coupler

- housing of the SC-D coupler made of zinc die-casting or plastic, screws included in the delivery
- slotted zirconium oxide ceramics sleeve (ZrO2) for single mode applications
- slotted metal sleeve (PhBr) for multi mode applications
- high material stability, surface quality and long service life
- service life min. 1000 mating cycles with slotted zirconium oxide ceramics sleeve
- service life min. 500 mating cycles with slotted metal sleeve
- variants: metal (SM), blue (SM), green (SM APC), metal (MM), heather violet (OM4), aqua (OM3), beige (OM2)

Dimensional drawing

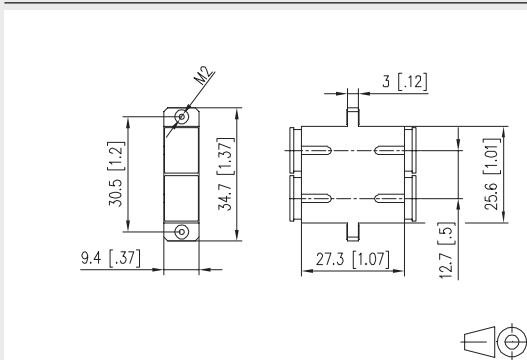


P/N	Color	Feature 1	Feature 2	EAN
150900D2-I	metallike	SC-D (ceramic)	SM	4250184111733
150900E2-I	blue	SC-D (ceramic)	SM	4250184151890
150900S2-I	metallike	SC-D (ceramic)	MM	4250184109501
150900C2-I	metallike	SC-D (Ph-Br)	MM	4250184111726
150900BB-I	heat. violet	SC-D (ceramic)	MM	4250184149590
150900BA-I	aqua	SC-D (ceramic)	MM	4250184149606
150900B2-I	beige	SC-D (ceramic)	MM	4250184149613
150900H2-I	beige	SC-D (Ph-Br)	MM	4250184179467



ST-D coupler

- housing of the ST-D coupler made of zinc die-casting; screws included in the delivery
- slotted zirconium oxide ceramics sleeve (ZrO2) for single mode applications
- slotted sleeve made of metal (Ph-Br) for multi mode applications
- high material stability, surface quality and long service life
- service life min. 1000 mating cycles with slotted zirconium oxide ceramics sleeve (ZrO2)
- service life min. 500 mating cycles with slotted metal sleeve (PhBr)
- variants: Ph-Br, ceramics

Dimensional drawing

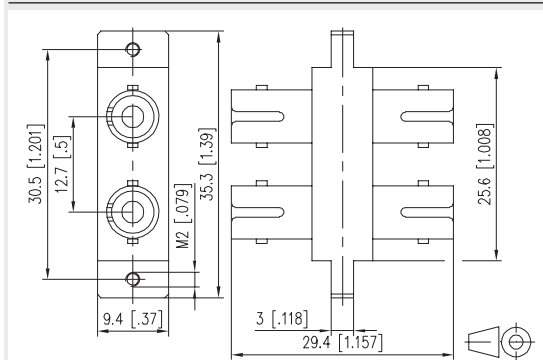

P/N	Color	Feature 1	Feature 2	EAN
15090041-I	metallike	ST-D (Ph-Br)	MM	4250184118121
150900D1-I	metallike	ST-D (ceramic)	SM / MM	4250184167051

SC-D/ST coupler is matching accessories for


	Page
OpDAT REGplus for 6xSC-D, unequipped, / 1xM20, with shrink splice holder	76
OpDAT REGpro front cover 3RU, 7HP / for 6xSC-D/6xLC-Q, unequipped	77



SC-D/ST coupler

- housing of the SC-D/ST coupler made of zinc die-casting; screws included in the delivery
- slotted sleeve made of zirconium oxide ceramics (ZrO₂) for single mode applications
- slotted sleeve made of metal (Ph-Br) for multi mode applications
- high material stability and surface quality and long service life
- min. service life 1000 plug-in cycles for sleeve made of zirconium oxide ceramics (ZrO₂)
- min. service life 500 plug-in cycles for sleeve made of metal (Ph-Br)
- variants: Ph-Br, ceramics

Dimensional drawing

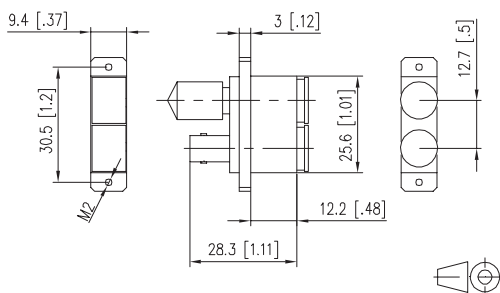

P/N	Color	Feature 1	Feature 2	EAN
150900C3-I	metallike	SC-D/ST (Ph-Br)	MM	4250184118114
150900D3-I	metallike	SC-D/ST (cer.)	SM / MM	4250184135265